




view



RAL



size

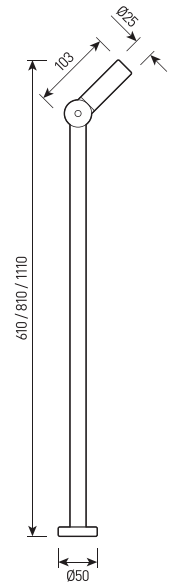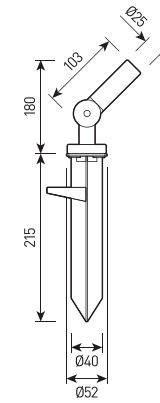

ISEO S

LED luminaire for landscape lighting

Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	12°, 21°, 36°, 45°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature:	3000K, 4000K, 5000K
Input voltage:	24V
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	1.2–3.2 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
624215128	ISEO S 120mm 1,5W 24V IP65	1,5W	D25x120	24V	12°,21°,36°,45°	3000K, 4000K, 5000K	1.2
624215130	ISEO S 610mm 1,5W 24V IP65	1,5W	D25x610	24V	12°,21°,36°,45°	3000K, 4000K, 5000K	2.0
624215132	ISEO S 810mm 1,5W 24V IP65	1,5W	D25x810	24V	12°,21°,36°,45°	3000K, 4000K, 5000K	2.8
624215134	ISEO S 1110mm 1,5W 24V IP65	1,5W	D25x1110	24V	12°,21°,36°,45°	3000K, 4000K, 5000K	3.2