

view



RAL



1 LIBRETA XS

2 LIBRETA S


3 LIBRETA M

4 LIBRETA L




size


1

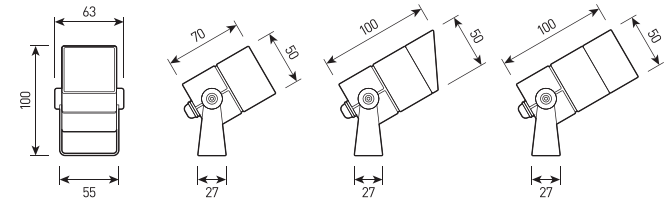


2

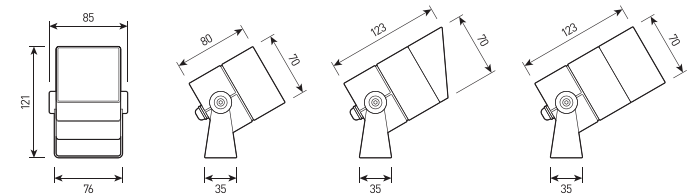

3

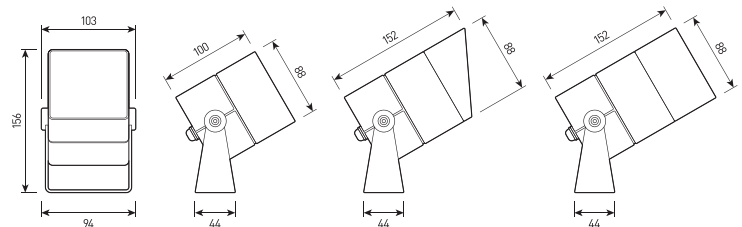

4

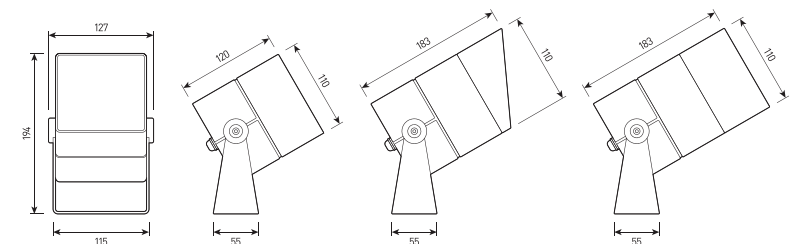



LIBRETA

Multifunctional LED mini-spotlight

Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	5°, 8°, 10°, 12°, 20°, 25°, 30°, 40°, 45°, 60°, 10°×22°, 15°×55°, 20°×60°
Housing color:	Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K, 5700K, R, G, B, RGB 3in1, RGBW 3in1
Input voltage:	24V, 220V
Control system:	On/Off, DMX512, [24V version for external 0-10V/DALI power supply]
Ingress Protection Rating, IP:	IP66
Operating temperature:	−40°C ~ +50°C
Weight:	0.8–3.5 kg

Article		Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
622201184	LIBRETA XS 3W SINGLE 24V/220V IP66		3W	50x63x100	24V, 220V	5°, 8°, 10°, 12°, 15°, 20°, 24°, 36°, 60°, 10°×30°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	0.8
622201186	LIBRETA XS 3W RGB DMX512 24V IP66		3W	50x63x100	24V	15°, 25°, 60°, 15°×30°	RGB	0.8
622201188	LIBRETA XS 3W RGBW DMX512 24V IP66		3W	50x63x100	24V	15°, 25°, 60°, 15°×30°	RGBW	0.8
622201190	LIBRETA S 6W SINGLE 24V/220V IP66		6W	70x85x121	24V, 220V	5°, 8°, 10°, 12°, 20°, 25°, 30°, 40°, 45°, 60°, 10°×22°, 15°×55°, 20°×60°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	1.4
622201192	LIBRETA S 9W RGB DMX512 24V IP66		9W	70x85x121	24V	25°, 40°, 60°	RGB	1.4
622201194	LIBRETA S 12W RGBW DMX512 24V IP66		12W	70x85x121	24V	25°, 40°, 60°	RGBW	1.4
622201196	LIBRETA M 10W SINGLE 24V/220V IP66		10W	88x103x156	24V, 220V	1°, 3°, 6°, 10°, 12°, 20°, 40°, 6°×40°, 10°×20°, 10°×30°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	2.0
622201198	LIBRETA M 14W RGB DMX512 24V IP66		14W	88x103x156	24V	20°, 40°	RGB	2.0
622201200	LIBRETA M 16W RGBW DMX512 24V IP66		16W	88x103x156	24V	20°, 40°	RGBW	2.0
622201202	LIBRETA L 18W SINGLE 24V/220V IP66		18W	110x127x194	24V, 220V	5°, 8°, 10°, 12°, 20°, 25°, 30°, 40°, 45°, 60°, 10°×22°, 20°×60°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	3.5
622201204	LIBRETA L 24W RGB DMX512 24V IP66		24W	110x127x194	24V	25°, 40°, 60°	RGB	3.5
622201206	LIBRETA L 32W RGBW DMX512 24V IP66		32W	110x127x194	24V	25°, 40°, 60°	RGBW	3.5