


view




1 overall dimensions

1

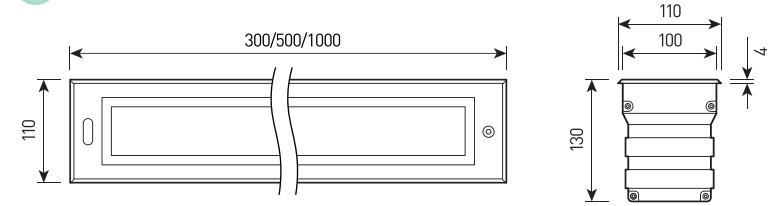

size



LYNX RM

Built-in linear ground luminaire with rotating matrix

Housing:	Aluminum, stainless steel
Beam angle:	2.5°, 6°, 8°, 9°, 12°, 20°, 30°, 45°, 60°, 10x30°, 10x60°, 10x70°, 15x60°, 5x20°
Housing color:	Grey
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, RGBW4in1
Input voltage, V:	24V, 220V
Control system:	On/Off, 1-10V, DALI, DMX-512
Ingress Protection Rating, IP:	IP67
Operating temperature:	-40°C ~ +50°C
Weight, kg:	8.0–15.0 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle, degrees	Color temperature, K	Weight, kg
825030196	LYNX RM 300mm 20W 220V SINGLE IP67	20W	300x110x130	24V, 220V	6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K	8.0
825030198	LYNX RM 300mm 30W 220V SINGLE IP67	30W	300x110x130	24V, 220V	2.5°, 6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K	8.0
825030200	LYNX RM 300mm 20W 220V DMX-512 RGBW 4in1 IP67	20W	300x110x130	24V, 220V	20°, 30°, 10x30°, 10x60°	RGBW4in1	8.0
825030202	LYNX RM 300mm 30W 220V DMX-512 RGBW 4in1 IP67	30W	300x110x130	24V, 220V	9°, 15°, 20°, 30°, 45°, 15x60°	RGBW4in1	8.0
825030204	LYNX RM 500mm 30W 220V SINGLE IP67	30W	500x110x130	24V, 220V	6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K	12.0
825030206	LYNX RM 500mm 50W 220V SINGLE IP67	50W	500x110x130	24V, 220V	2.5°, 6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K	12.0
825030208	LYNX RM 500mm 30W 220V DMX-512 RGBW 4in1 IP67	30W	500x110x130	24V, 220V	20°, 30°, 10x30°, 10x60°	RGBW4in1	12.0
825030210	LYNX RM 500mm 50W 220V DMX-512 RGBW 4in1 IP67	50W	500x110x130	24V, 220V	9°, 15°, 20°, 30°, 45°, 15x60°	RGBW4in1	12.0
825030212	LYNX RM 1000mm 60W 220V SINGLE IP67	60W	1000x110x130	24V, 220V	6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K	15.0
825030214	LYNX RM 1000mm 100W 220V SINGLE IP67	100W	1000x110x130	24V, 220V	2.5°, 6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K	15.0
825030216	LYNX RM 1000mm 60W 220V DMX-512 RGBW 4in1 IP67	60W	1000x110x130	24V, 220V	8°, 15°, 20°, 30°, 45°, 10x30°, 15x60°	RGBW4in1	15.0
825030218	LYNX RM 1000mm 100W 220V DMX-512 RGBW 4in1 IP67	100W	1000x110x130	24V, 220V	9°, 15°, 20°, 30°, 45°, 15x60°	RGBW4in1	15.0