

LYNX S

USER MANUAL



The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.


Installation Instructions

A. Technical Parameters


Product name	LYNX S
Product code	825
Input Voltage	DC 24V
Power	10 - 15W
Beam Angle	120°
Color temperature	SINGLE COLOR, RGB
Colour rendering index	>70 CRI
Working Environment	-40°C to +50°C
Dimensions	1000x50x90mm
Net weight	3.0 Kg
Control Mode	On/Off, DMX-512

Installation Instructions

1. According to step 1, laying 20cm or much deeper water-seepage sand in the mounting hole before installing the buried barrel.
2. According to step 2, install the buried barrel.

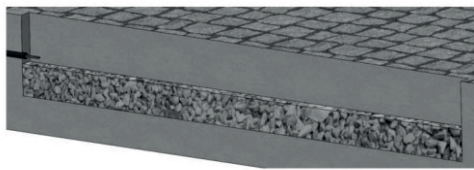


Step ①

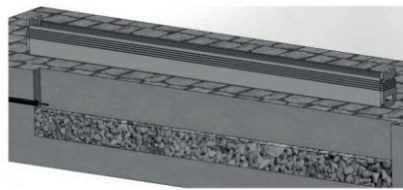


Step ②

3. According to step 3, install the lamp body of LED inground light .
{ Remark A: in order to fasten lamp body to the buried barrel , suggest applying the glass cement on the contact area between both two in the horizontal and ambient direction. }
4. According to step 4, complete the installation.

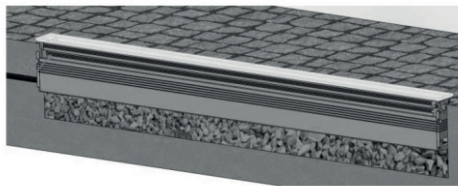

Step ③

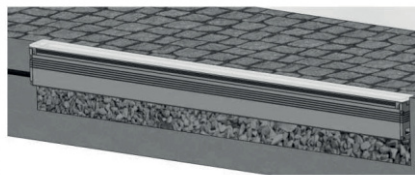

Step ④

5. Notes:

The buried barrel must get reliable connection with the lamp body, any screws in the lamps should not be arbitrarily loosed. There is no special requirement on the installation depth.

Remarks for the cables.

When you get the fixture, please check and find the relative version and confirm its Color Temperature, Electrical class, the cable out.

Overall dimensions

