


LYNX S (OPTIC)



view



size

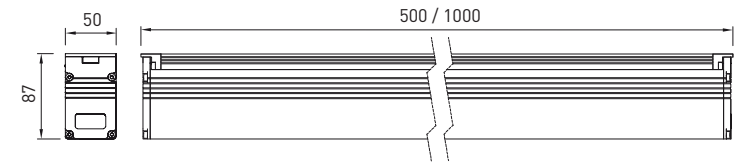

LYNX S (OPTIC)

Linear recessed LED for architectural lighting

Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Metallic
Beam angle:	8°, 12.5°, 20°, 30°, 45°, 60°, 120°, 10°×60°, 15°×30°
Color temperature:	2700K, 3000K, 4000K, 5000K, 6000K, 6500K, RGB
Control system:	On/Off, DMX-512
Input voltage:	24 V
IES protection classes:	Class III (SELV)
Impact protection rating:	IK10
Protection Rating:	IP67
Operating temperature:	−40°C ~ +50°C
Weight:	2 – 3 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
825011050	LYNX S (OPTIC) 11W SINGLE 24V 500mm IP67	11 W	500x50x87	24 V	8°, 12.5°, 20°, 30°, 45°, 60°, 15°×30°, 10°×60°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	2
825011060	LYNX S (OPTIC) 11W DMX-512 RGB 24V 500mm IP67	11 W	500x50x87	24 V	8°, 12.5°, 20°, 30°, 45°, 60°, 15°×30°, 10°×60°	RGB	2
825021050	LYNX S (OPTIC) 21W SINGLE 24V 1000mm IP67	21 W	1000x50x87	24 V	8°, 12.5°, 20°, 30°, 45°, 60°, 15°×30°, 10°×60°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	3
825028050	LYNX S (OPTIC) 28W SINGLE 24V 1000mm IP67	28 W	1000x50x87	24 V	8°, 12.5°, 20°, 30°, 45°, 60°, 15°×30°, 10°×60°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	3
825042050	LYNX S (OPTIC) 42W SINGLE 24V 1000mm IP67	42 W	1000x50x87	24 V	8°, 12.5°, 20°, 30°, 45°, 60°, 15°×30°, 10°×60°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	3
825021060	LYNX S (OPTIC) 21W DMX-512 RGB 24V 1000mm IP67	21 W	1000x50x87	24 V	8°, 12.5°, 20°, 30°, 45°, 60°, 15°×30°, 10°×60°	RGB	3
825028060	LYNX S (OPTIC) 28W DMX-512 RGB 24V 1000mm IP67	28 W	1000x50x87	24 V	8°, 12.5°, 20°, 30°, 45°, 60°, 15°×30°, 10°×60°	RGB	3
825042060	LYNX S (OPTIC) 42W DMX-512 RGB 24V 1000mm IP67	42 W	1000x50x87	24 V	8°, 12.5°, 20°, 30°, 45°, 60°, 15°×30°, 10°×60°	RGB	3