


MIO BARREL PRO




view




size


1 114 mm

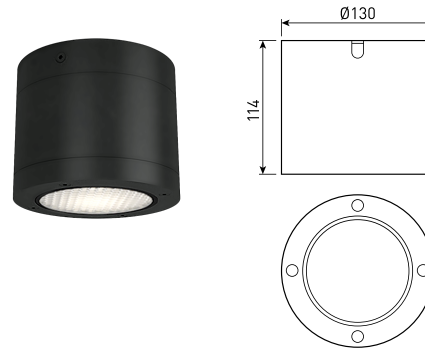

2 176 mm

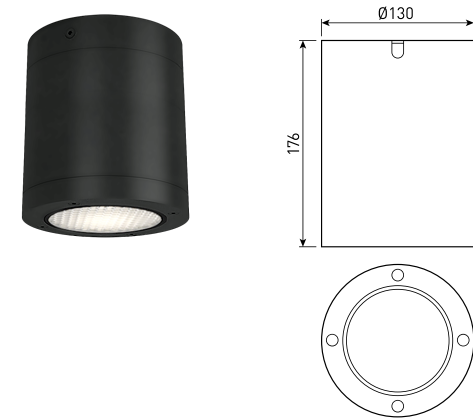

3 Mounting plate

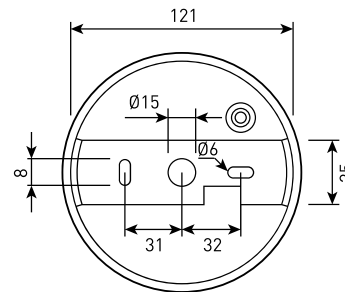

MIO BARREL PRO

Surface mounted LED ceiling light

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Black, White, Silver
Diffuser:	Clear tempered glass
Beam angle:	9°, 15°, 20°, 30°, 35°, 40°, 45°
Color temperature:	3000K, 4000K, 6000K
Control system:	On/Off
Color rendering index:	CRI >80
Input voltage:	24 V, 220 V
IES protection classes:	Class I, Class III (SELV)
Protection Rating:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	1.4 – 1.55 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
726008010	MIO Barrel Pro 3000K 8W COB 220V IP65	8 W	Ø130×114	24 V, 220 V	35°	3000K	1.4
726008020	MIO Barrel Pro 4000K 8W COB 220V IP65	8 W	Ø130×114	24 V, 220 V	35°	4000K	1.4
726008030	MIO Barrel Pro 6000K 8W COB 220V IP65	8 W	Ø130×114	24 V, 220 V	35°	6000K	1.4
726012010	MIO Barrel Pro 3000K 12W 220V IP65	12 W	Ø130×114	24 V, 220 V	9°, 15°, 20°, 30°, 45°	3000K	1.4
726012020	MIO Barrel Pro 4000K 12W 220V IP65	12 W	Ø130×114	24 V, 220 V	9°, 15°, 20°, 30°, 45°	4000K	1.4
726012030	MIO Barrel Pro 6000K 12W 220V IP65	12 W	Ø130×114	24 V, 220 V	9°, 15°, 20°, 30°, 45°	6000K	1.4
726018010	MIO Barrel Pro 3000K 18W 220V IP65	18 W	Ø130×176	24 V, 220 V	15°, 30°, 40°	3000K	1.55
726018020	MIO Barrel Pro 4000K 18W 220V IP65	18 W	Ø130×176	24 V, 220 V	15°, 30°, 40°	4000K	1.55
726018030	MIO Barrel Pro 6000K 18W 220V IP65	18 W	Ø130×176	24 V, 220 V	15°, 30°, 40°	6000K	1.55