

# ORIOS TOP



## view




RAL



- 1 ORIOS S
- 2 ORIOS M
- 3 ORIOS L
- 4 ORIOS XL



## size

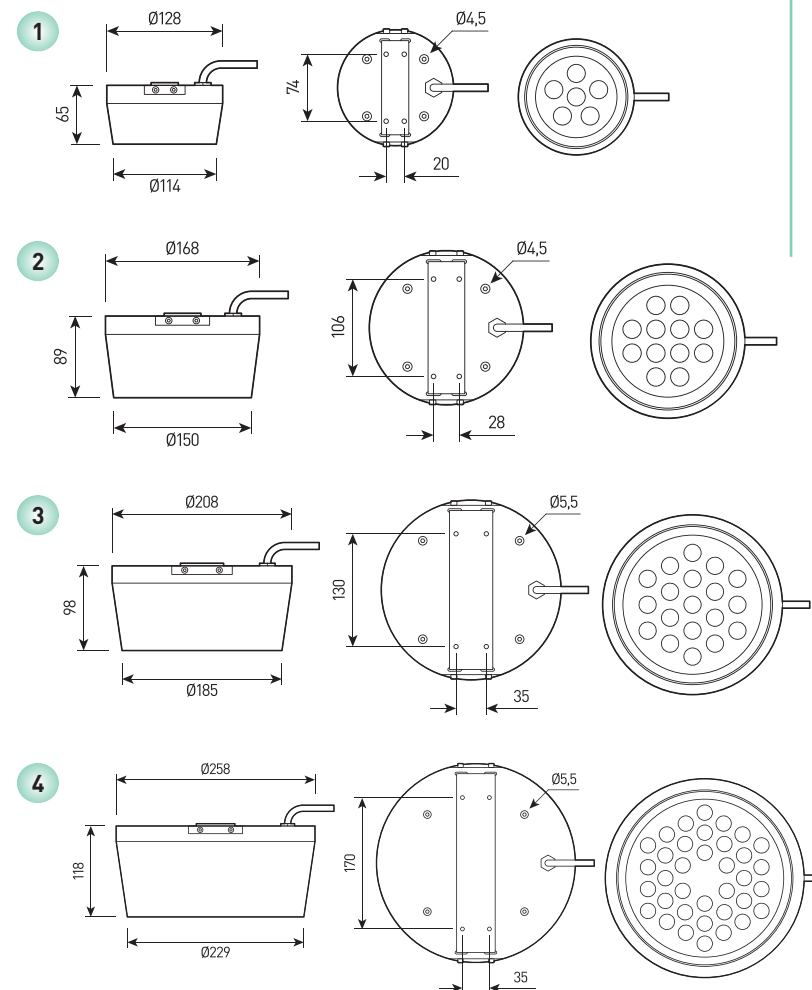

# ORIOSIS TOP

Multifunctional recessed LED for accent lighting

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Beam angle:</b>	15°, 25°, 40°, 60°, 90°
<b>Housing color:</b>	Black, Grey, RAL
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature, K:</b>	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1, Tunable white
<b>Input voltage, V:</b>	24V, 220V
<b>Control system:</b>	On/Off, DMX-512, 1-10V, TRIAC, DALI
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight, kg:</b>	1.5 - 4.2 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
771144136	ORIOSIS TOP S 12W 24V/220V IP66 Single Color	12W	D128x65	24V/220V	15°, 25°, 40°, 60°, 90°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	1.5
771144138	ORIOSIS TOP S 12W RGB 3in1 DMX-512 24V IP66	12W	D128x65	24V	15°, 25°, 40°, 60°, 90°	RGB	1.5
771144140	ORIOSIS TOP S 12W RGBW 4in1 DMX-512 24V IP66	12W	D128x65	24V	15°, 25°, 40°, 60°, 90°	RGBW	1.5
771144142	ORIOSIS TOP M 20W 24V/220V IP66 Single Color	20W	D168x89	24V/220V	15°, 25°, 40°, 60°, 90°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2.4
771144144	ORIOSIS TOP M 24W RGB 3in1 DMX-512 24V IP66	24W	D168x89	24V	15°, 25°, 40°, 60°, 90°	RGB	2.4
771144146	ORIOSIS TOP M 24W RGBW 4in1 DMX-512 24V IP66	24W	D168x89	24V	15°, 25°, 40°, 60°, 90°	RGBW	2.4
771144148	ORIOSIS TOP L 40W 24V/220V IP66 Single Color	40W	D208x98	24V/220V	15°, 25°, 40°, 60°, 90°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	3.4
771144150	ORIOSIS TOP L 48W RGB 3in1 DMX-512 24V IP66	48W	D208x98	24V	15°, 25°, 40°, 60°, 90°	RGB	3.4
771144152	ORIOSIS TOP L 48W RGBW 4in1 DMX-512 24V IP66	48W	D208x98	24V	15°, 25°, 40°, 60°, 90°	RGBW	3.4
771144154	ORIOSIS TOP XL 60W 24V/220V IP66 Single Color	60W	D258x118	24V/220V	15°, 25°, 40°, 60°, 90°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	4.2
771144156	ORIOSIS TOP XL 72W RGB 3in1 DMX-512 24V IP66	72W	D258x118	24V	15°, 25°, 40°, 60°, 90°	RGB	4.2
771144158	ORIOSIS TOP XL 72W RGBW 4in1 DMX-512 24V IP66	72W	D258x118	24V	15°, 25°, 40°, 60°, 90°	RGBW	4.2