

view



1 OUTLED S


2 OUTLED M

3 OUTLED L




size


1

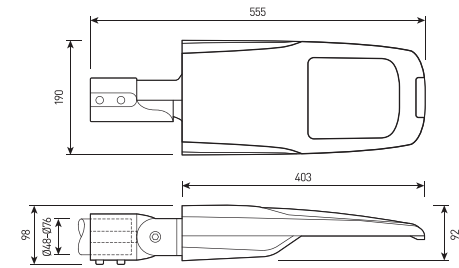

2

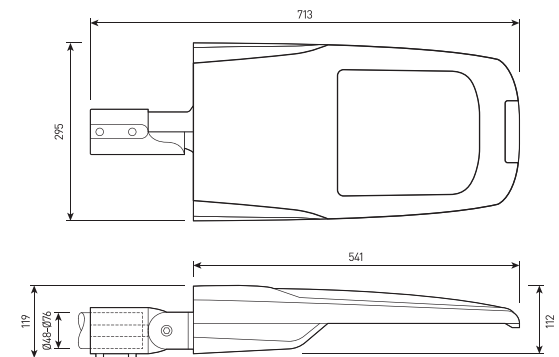

3

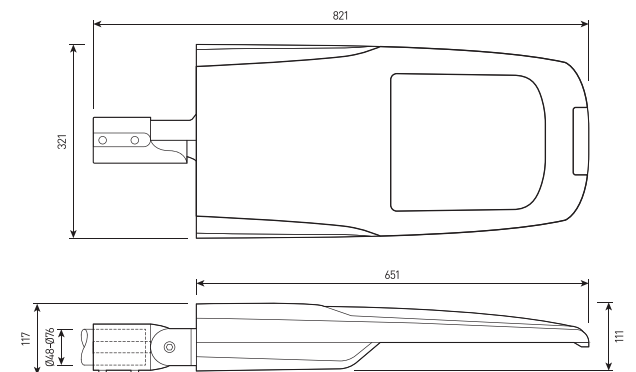

OUTLED

High-power luminaire designed for lighting large areas or motorways

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	40°x145°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature:	3000K, 4000K, 5000K
Input voltage:	220 V
Control system:	On/Off
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	4.5-10 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
615040010	OUTLED S 40W 220V IP66	40W	555x190x98	220V	40°x145°	3000K, 4000K, 5000K	4.5
615040010	OUTLED S 60W 220V IP66	60W	555x190x98	220V	40°x145°	3000K, 4000K, 5000K	4.5
615080010	OUTLED M 80W 220V IP66	80W	813x295x119	220V	40°x145°	3000K, 4000K, 5000K	7.5
615110010	OUTLED M 110W 220V IP66	110W	813x295x119	220V	40°x145°	3000K, 4000K, 5000K	7.5
615130010	OUTLED L 130W 220V IP66	130W	821x321x117	220V	40°x145°	3000K, 4000K, 5000K	10
615150010	OUTLED L 150W 220V IP66	150W	821x321x117	220V	40°x145°	3000K, 4000K, 5000K	10
615180010	OUTLED L 180W 220V IP66	180W	821x321x117	220V	40°x145°	3000K, 4000K, 5000K	10
615215010	OUTLED L 215W 220V IP66	215W	821x321x117	220V	40°x145°	3000K, 4000K, 5000K	10
615260010	OUTLED L 260W 220V IP66	260W	821x321x117	220V	40°x145°	3000K, 4000K, 5000K	10
615300010	OUTLED L 300W 220V IP66	300W	821x321x117	220V	40°x145°	3000K, 4000K, 5000K	10