



OUTLED





High-power models are designed for lighting large areas or motorways. Searchlights power up to 215W are perfect for parks and areas for office centers.



SPECIFICATION

Housing: Pressure die-cast aluminum alloy with polyester powder paint.
 Fixation diameter to the support: d60 (different options)
 Beam angle: 40x145°, 1-8 type
 Housing color: Black, Grey, RAL
 Color temperature, K: 3000K, 4000K, 5000K
 Power factor: >0.9
 Input voltage, V: 220V
 IK: 09
 CRI:>70
 Ingress Protection, IP: IP66
 Operating temperature: -25°C ~ +50°C
 Guaranteed lifetime, hours: >100, 000h

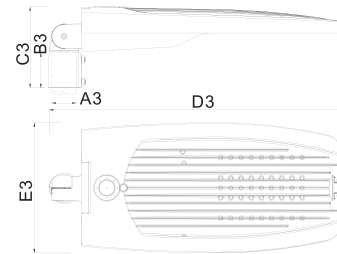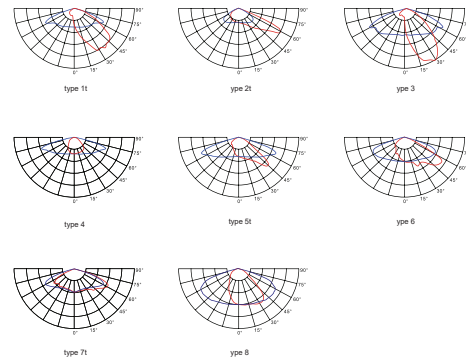

Name	A3	B3	C3	D3	E3
Outled S	d60	90	180	460	190
Outled M	d60	90	200	620	295
Outled L	d60	90	200	730	320

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, type	Color temperature, K	Weight, kg
615040010	OUTLED S 40W 220V IP66	40W	460x190 (optional)	220V	40x145° (1-8 type)	3000K-5000K	4.5kg
615060010	OUTLED S 60W 220V IP66	60W	460x190 (optional)	220V	40x145° (1-8 type)	3000K-5000K	4.5kg
615080010	OUTLED M 80W 220V IP66	80W	620x295 (optional)	220V	40x145° (1-8 type)	3000K-5000K	7.5kg
615110010	OUTLED M 110W 220V IP66	110W	620x295 (optional)	220V	40x145° (1-8 type)	3000K-5000K	7.5kg
615130010	OUTLED L 130W 220V IP66	130W	730x320 (optional)	220V	40x145° (1-8 type)	3000K-5000K	10kg
615150010	OUTLED L 150W 220V IP66	150W	730x320 (optional)	220V	40x145° (1-8 type)	3000K-5000K	10kg
615180010	OUTLED L 180W 220V IP66	180W	730x320 (optional)	220V	40x145° (1-8 type)	3000K-5000K	10kg
615215010	OUTLED L 215W 220V IP66	215W	730x320 (optional)	220V	40x145° (1-8 type)	3000K-5000K	10kg
615260010	OUTLED L 260W 220V IP66	260W	730x320 (optional)	220V	40x145° (1-8 type)	3000K-5000K	10kg
615300010	OUTLED L 300W 220V IP66	300W	730x320 (optional)	220V	40x145° (1-8 type)	3000K-5000K	10kg