PICCO LOOM

view

size

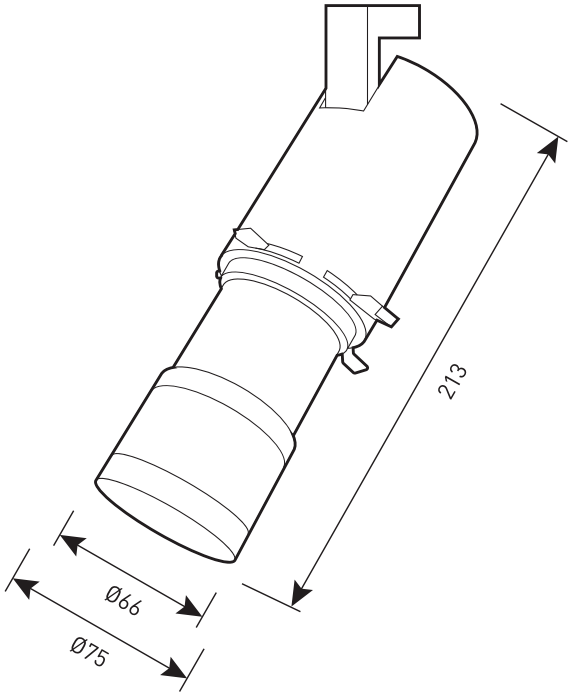

PICCO LOOM

Track spotlight for art galleries, museums and exhibitions

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	18°–30°, precise manual adjustment of the light spot, logo progection
Housing color:	Black, White
Glass:	Clear tempered glass
Reflector:	Anodized aluminum
Color temperature:	2700K, 3000K, 4000K, 5000K
Color rendering index, CRI:	>90
Ingress Protection Rating, IP:	IP20
Control system:	DALI
Luminous flux:	700 lm
Power factor:	>0,90
Flicker:	5%
Guaranteed lifetime, hours:	>50 000h

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle, degrees	Color temperature, K	Weight, kg
526015055	PICCO LOOM 20W 927 Dimm DALI Beam Adjust 220V IP20	20 W	Ø75×213	220 V	18°–30°	2700K	1.1
526015060	PICCO LOOM 20W 930 Dimm DALI Beam Adjust 220V IP20	20 W	Ø75×213	220 V	18°–30°	3000K	1.1
526015065	PICCO LOOM 20W 940 Dimm DALI Beam Adjust 220V IP20	20 W	Ø75×213	220 V	18°–30°	4000K	1.1
526015070	PICCO LOOM 20W 950 Dimm DALI Beam Adjust 220V IP20	20 W	Ø75×213	220 V	18°–30°	5000K	1.1