

PISTOL L



view




RAL



1 overall dimensions

size

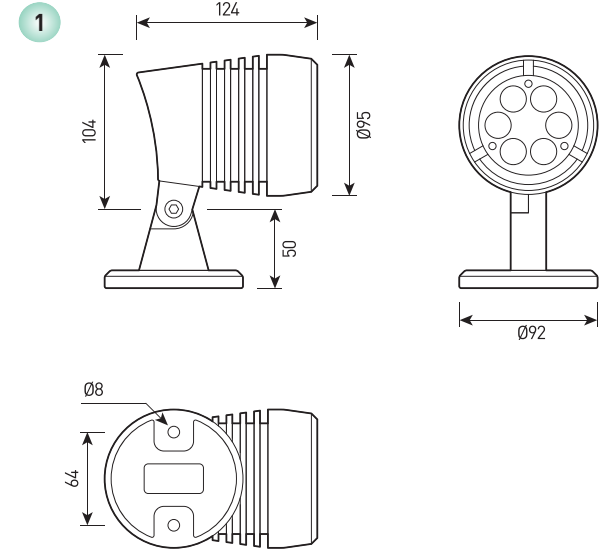

PISTOL L

Floodlight for accent lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	5°, 12.5°, 15°, 20°, 28°, 30°, 45°, 60°, 15x30°, 10x60°
Housing color:	Grey, Black, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B
Input voltage, V:	24V, 220V
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight, kg:	1.2 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
762011055	PISTOL L 11W 24V IP65 Ground / Wall	11W	D95x124x154	24V	5°, 12,5°, 20°, 30°, 45°, 60°, 15x30°, 10x60°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	1.2
762011056	PISTOL L 11W 220V IP65 Ground / Wall	11W	D95x124x154	220V	5°, 12,5°, 20°, 30°, 45°, 60°, 15x30°, 10x60°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	1.2
762016065	PISTOL L 16W 24V IP65 Ground / Wall	16W	D95x124x154	24V	5°, 12,5°, 20°, 30°, 45°, 60°, 15x30°, 10x60°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	1.2
762016066	PISTOL L 16W 220V IP65 Ground / Wall	16W	D95x124x154	220V	5°, 12,5°, 20°, 30°, 45°, 60°, 15x30°, 10x60°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	1.2