

PISTOL S/M



view



RAL




1 PISTOL S

2 PISTOL M




size

1

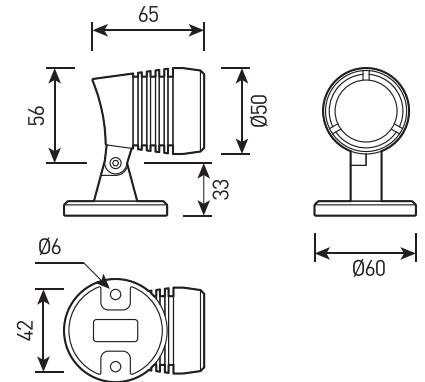

2

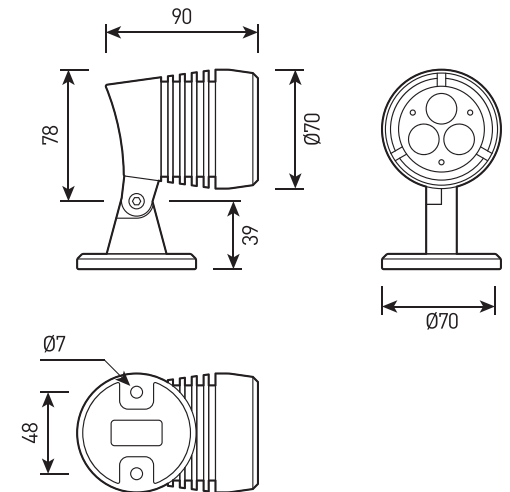

PISTOL S/M

Floodlight for accent lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	5°, 12.5°, 15°, 20°, 28°, 30°, 45°, 60°, 15x30°, 10x60°
Housing color:	Grey, Black, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B
Input voltage, V:	24V, 220V
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight, kg:	0.5 - 0.8 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
762002025	PISTOL S 1,5W 24V IP65 Ground / Wall	1.5W	D50x65x89	24V	15°, 28°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	0.5
762002026	PISTOL S 1,5W 220V IP65 Ground / Wall	1.5W	D50x65x89	220V	15°, 28°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	0.5
762003035	PISTOL S 3W 24V IP65 Ground / Wall	3W	D50x65x89	24V	15°, 28°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	0.5
762003036	PISTOL S 3W 220V IP65 Ground / Wall	3W	D50x65x89	220V	15°, 28°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	0.5
762006045	PISTOL M 6W 24V IP65 Ground / Wall	6W	D70x90x117	24V	5°, 12.5°, 20°, 30°, 45°, 60°, 15x30°, 10x60°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	0.8
762006046	PISTOL M 6W 220V IP65 Ground / Wall	6W	D70x90x117	220V	5°, 12.5°, 20°, 30°, 45°, 60°, 15x30°, 10x60°	2700K, 3000K, 4000K, 5000K, 5700K, 6500K, R, G, B	0.8