


view



size

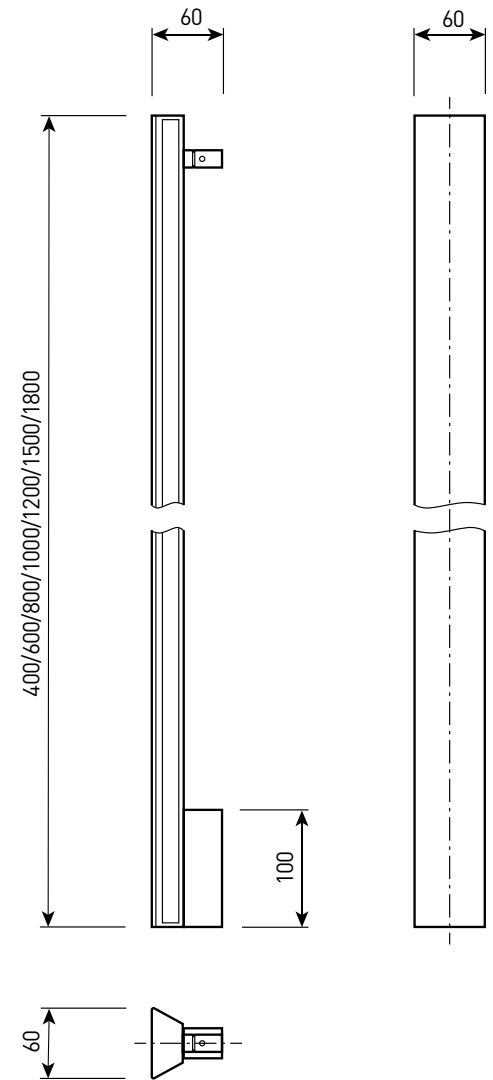

PLANK

Wall luminaire for architectural lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Black, Grey, Ochre
Beam angle:	120°
Color temperature:	3000K
Control system:	On/Off
Color rendering index:	CRI >80
Input voltage:	24 V, 220 V
IES protection classes:	Class I, Class III (SELV)
Protection Rating:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	0.6 – 2.8 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
760006012	PLANK 400mm 10W 24V IP66	10 W	400×60×60	24 V	120°	3000K	0.6
760006014	PLANK 600mm 15W 24V IP66	15 W	600×60×60	24 V	120°	3000K	0.9
760006016	PLANK 800mm 20W 24V IP66	20 W	800×60×60	24 V	120°	3000K	1.2
760006018	PLANK 1000mm 25W 24V IP66	25 W	1100×60×60	24 V	120°	3000K	1.7
760006020	PLANK 1200mm 28W 24V IP66	28 W	1200×60×60	24 V	120°	3000K	1.9
760006022	PLANK 1500mm 36W 24V IP66	36 W	1500×60×60	24 V	120°	3000K	2.4
760006024	PLANK 1800mm 45W 24V IP66	45 W	1800×60×60	24 V	120°	3000K	2.7
760006026	PLANK 400mm 8W 220V IP66	8 W	400×60×60	220 V	120°	3000K	0.7
760006028	PLANK 600mm 12W 220V IP66	12 W	600×60×60	220 V	120°	3000K	1
760006030	PLANK 800mm 16W 220V IP66	16 W	800×60×60	220 V	120°	3000K	1.3
760006032	PLANK 1100mm 20W 220V IP66	20 W	1100×60×60	220 V	120°	3000K	1.8
760006034	PLANK 1200mm 24W 220V IP66	24 W	1200×60×60	220 V	120°	3000K	2
760006036	PLANK 1500mm 30W 220V IP66	30 W	1500×60×60	220 V	120°	3000K	2.5
760006038	PLANK 1800mm 36W 220V IP66	36 W	1800×60×60	220 V	120°	3000K	2.8