

view



RAL


1 SOFTEYE ROUND

2 SOFTEYE QUADRO




size

1

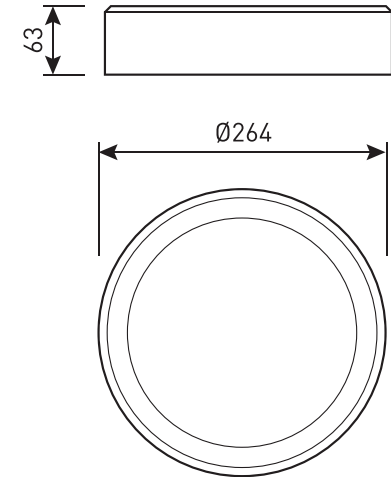

2

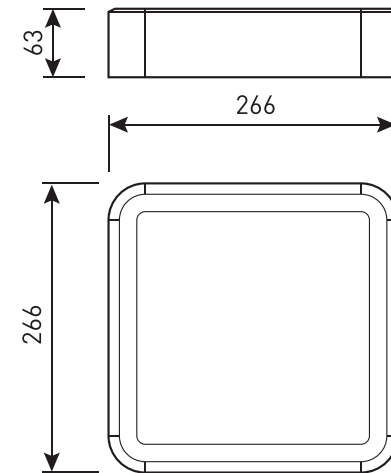

SOFTEYE

LED outdoor ceiling-wall lighting

Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	120°
Housing color:	Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K, 5000K
Input voltage:	220V
Control system:	On/Off, DALI
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	2.0-2.5 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
69505010	SOFTEYE ROUND 15W 220V IP65	15W	D264x63	220V	120°	2700K, 3000K, 4000K, 5000K	2.0
69505012	SOFTEYE ROUND 25W 220V IP65	25W	D264x63	220V	120°	2700K, 3000K, 4000K, 5000K	2.0
69505015	SOFTEYE QUADRO 15W 220V IP65	15W	266x266x63	220V	120°	2700K, 3000K, 4000K, 5000K	2.5
69505017	SOFTEYE QUADRO 25W 220V IP65	25W	266x266x63	220V	120°	2700K, 3000K, 4000K, 5000K	2.5