

# **SOFTEYE QUADRO**

## **USER MANUAL**



The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

# Installation Instructions




---

## Technical Parameters


|                        |                |
|------------------------|----------------|
| Product name           | SOFTEYE QUADRO |
| Product code           | 695            |
| Input Voltage          | AC 220V        |
| Power                  | 15W, 25W       |
| Power Factor           | >0.9           |
| Beam Angle             | 120°           |
| Color temperature      | SINGLE COLOR   |
| Colour rendering index | >70 CRI        |
| Working Environment    | -40°C to +50°C |
| Dimensions             | 266x266x63mm   |
| Net weight             | 2.5 Kg         |
| Control Mode           | On/Off, DALI   |

## Installation Instructions



Please disconnect power before installation or any maintenance of the lamp

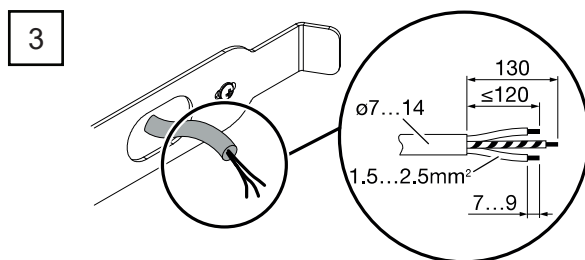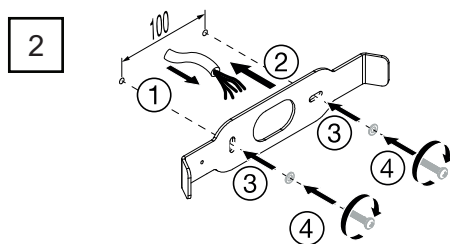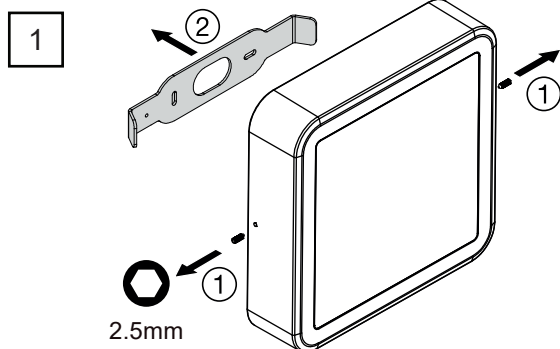

ON/OFF version

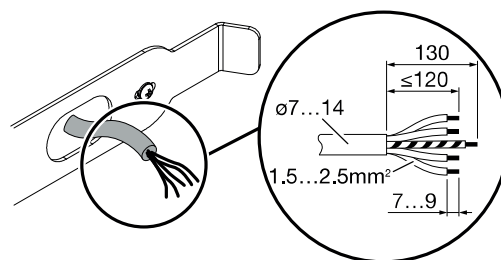


DALI version

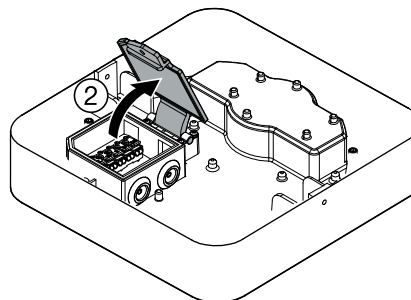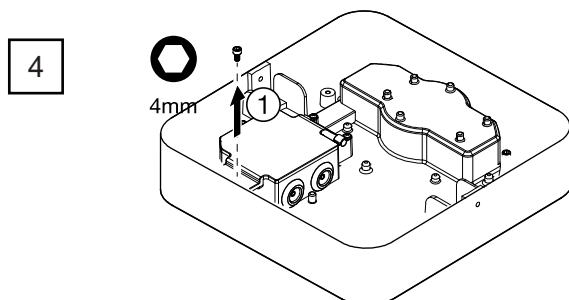


## Installation Instructions

5




ON/OFF




DALI

luminaire connection





ON/OFF




DALI

serial connection  
of several luminaires


6

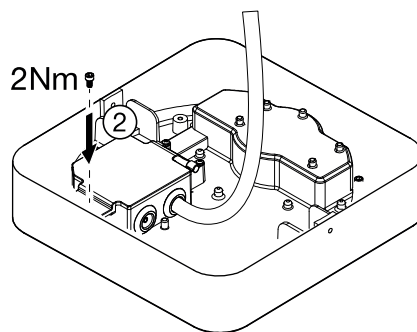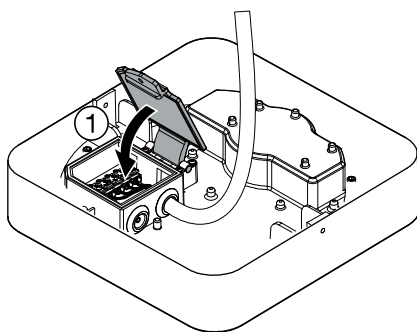

7

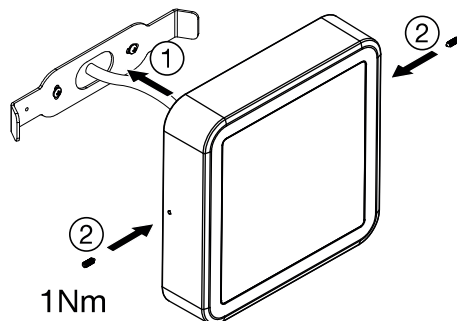


8

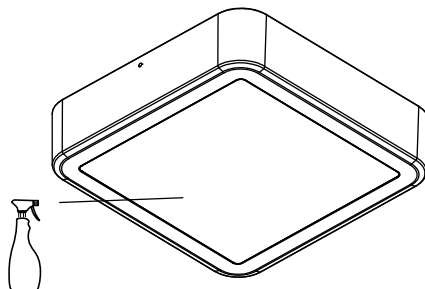

## Overall dimensions

---

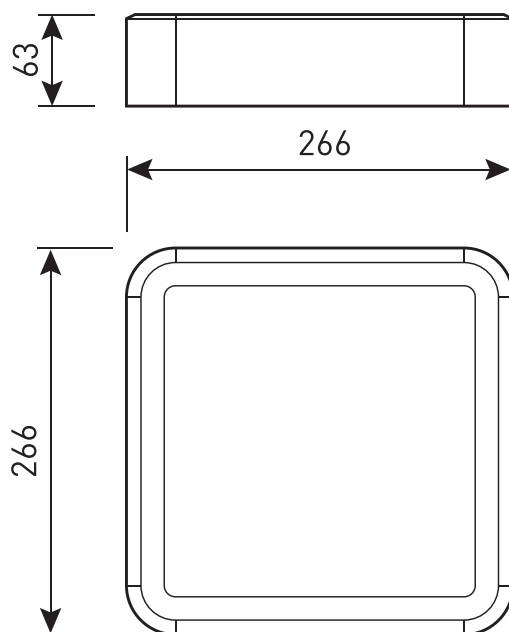

SOFTEYE QUADRO