

# STARLING TOP



## view









## size

1 STARLING S

2 STARLING M

3 STARLING L

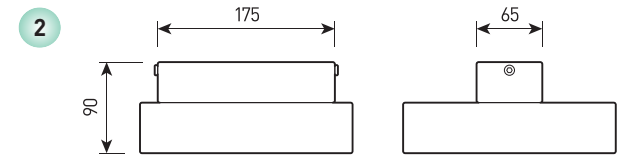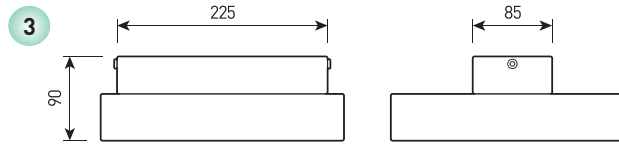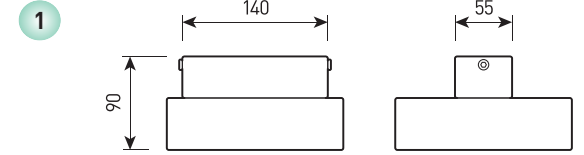

# STARLING TOP

Multifunctional recessed LED for accent lighting

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Beam angle:</b>	15°, 25°, 40°, 60°, 90°
<b>Housing color:</b>	Black, Grey, RAL
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature, K:</b>	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1, Tunable white
<b>Input voltage, V:</b>	24V, 220V
<b>Control system:</b>	On/Off, DMX-512, 1-10V, TRIAC, DALI
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight, kg:</b>	2.2 - 3.0 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
771144160	STARLING TOP S 20W 24V/220V IP66 Single Color	20W	170x170x90	24V/220V	15°, 25°, 40°, 60°, 90°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2.2
771144162	STARLING TOP S 18W RGB 3in1 DMX-512 24V IP66	18W	170x170x90	24V	15°, 25°, 40°, 60°, 90°	RGB	2.2
771144164	STARLING TOP S 18W RGBW 4in1 DMX-512 24V IP66	18W	170x170x90	24V	15°, 25°, 40°, 60°, 90°	RGBW	2.2
771144166	STARLING TOP M 40W 24V/220V IP66 Single Color	40W	210x210x90	24V/220V	15°, 25°, 40°, 60°, 90°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2.6
771144168	STARLING TOP M 36W RGB 3in1 DMX-512 24V IP66	36W	210x210x90	24V	15°, 25°, 40°, 60°, 90°	RGB	2.6
771144170	STARLING TOP M 36W RGBW 4in1 DMX-512 24V IP66	36W	210x210x90	24V	15°, 25°, 40°, 60°, 90°	RGBW	2.6
771144172	STARLING TOP L 60W 24V/220V IP66 Single Color	60W	260x260x90	24V/220V	15°, 25°, 40°, 60°, 90°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	3.0
771144174	STARLING TOP L 54W RGB 3in1 DMX-512 24V IP66	54W	260x260x90	24V	15°, 25°, 40°, 60°, 90°	RGB	3.0
771144176	STARLING TOP L 54W RGBW 4in1 DMX-512 24V IP66	54W	260x260x90	24V	15°, 25°, 40°, 60°, 90°	RGBW	3.0