

view





RAL



1 SWIFT L

2 SWIFT XL

size

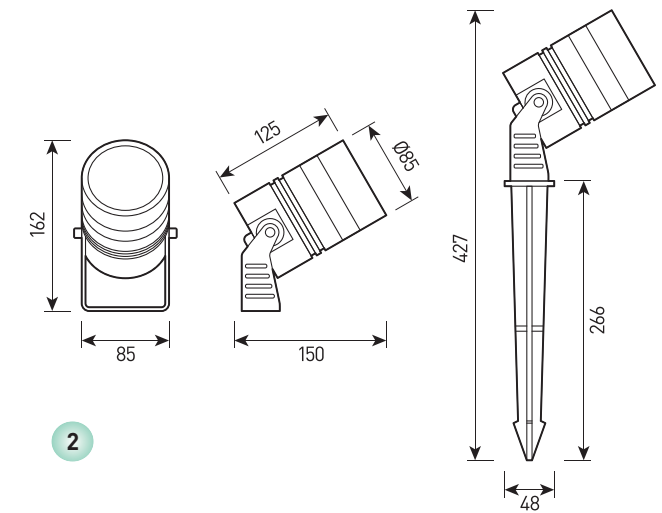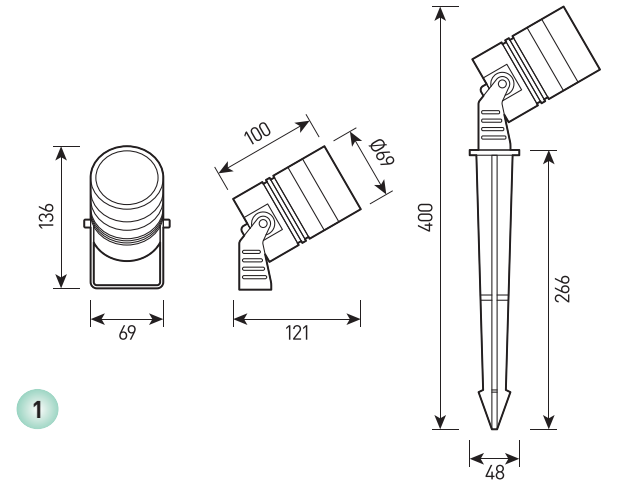

SWIFT L/XL

Multifunctional spotlight with adjustable beam angle for accent lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint.
Beam angle:	20-60°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K
Input voltage, V:	24V, 220V
Control system:	Switch On\Off
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	1,5-2,0kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
774026018	SWIFT L 10W 24V/220V IP66 Single Color	10W	d69x100	24V, 220V	20-60°	2700K, 3000K, 4000K, 5000K, 6000K	1,5kg
774026020	SWIFT XL 15W 24V/220V IP66 Single Color	15W	d85x125	24V, 220V	20-60°	2700K, 3000K, 4000K, 5000K, 6000K	2,0kg