


view



RAL



size

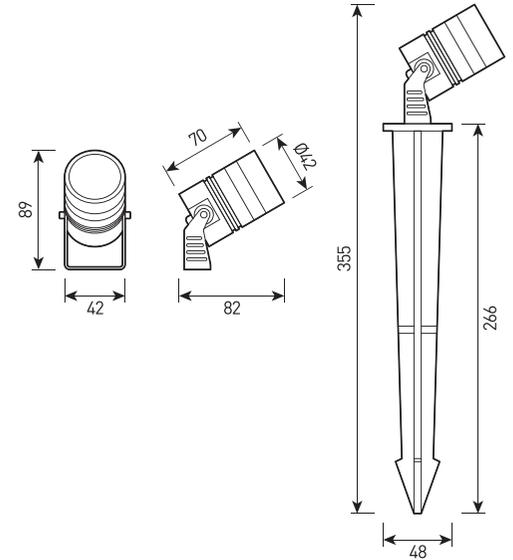

SWIFT S

Multifunctional spotlight with adjustable beam angle for accent lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Black, Grey, RAL
Beam angle:	10°-45°
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K, 5000K
Input voltage:	24V, 220V
Control system:	On/Off
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	0.5 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
774026014	SWIFT S 4W 24V/220V IP66 Single Color	4W	Ø42x70	24V, 220V	10°-45°	2700K, 3000K, 4000K, 5000K	0.5