


view



RAL



size

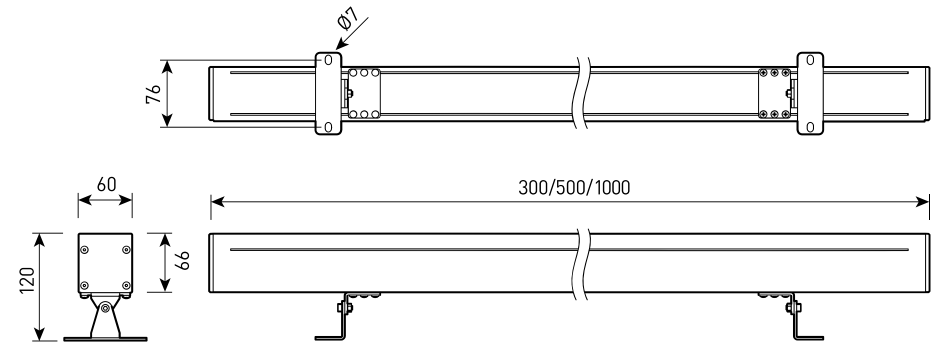

TENZER L

Linear luminaire for architectural and accent lighting

Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Black, Grey, RAL
Beam angle:	2.5°, 6°, 9°, 12°, 15°, 20°, 30°, 45°, 60°, 5°×20°, 10°×70°, 10°×60°, 15°×60°, Wallwasher
Color temperature:	2700K, 3000K, 4000K, 5000K, 6000K, RGBW, RGBWCLA
Control system:	On/Off, 0-10V, DALI, DMX-512
Input voltage:	24 V, 220 V
IES protection classes:	Class I, Class III (SELV)
Protection Rating:	IP66
Operating temperature:	−40°C ~ +50°C
Weight:	1.2 – 4.8 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
769190034	TENZER L 300mm 30W 24V/220V IP66 SINGLE COLOR	30 W	300×60×120	24 V, 220 V	6°, 12°, 20°, 30°, 60°, 10°×70°, 5°×20°, Wallwasher	2700K, 3000K, 4000K, 5000K, 6000K	1.2
769190036	TENZER L 300mm 30W RGBW 4in1 24V/220V DMX IP66	30 W	300×60×120	24 V, 220 V	9°, 15°, 20°, 30°, 45°, 15°×60°	RGBW	1.2
769190038	TENZER L 500mm 50W 24V/220V IP66 SINGLE COLOR	50 W	500×60×120	24 V, 220 V	6°, 12°, 20°, 30°, 60°, 10°×70°, 5°×20°, Wallwasher	2700K, 3000K, 4000K, 5000K, 6000K	2.5
769190040	TENZER L 500mm 50W RGBW 4in1 24V/220V DMX IP66	50 W	500×60×120	24 V, 220 V	9°, 15°, 20°, 30°, 45°, 15°×60°	RGBW	2.5
769190042	TENZER L 1000mm 100W 24V/220V IP66 SINGLE COLOR	100 W	1000×60×120	24 V, 220 V	2.5°, 6°, 12°, 20°, 30°, 60°, 10°×70°, 5°×20°, Wallwasher	2700K, 3000K, 4000K, 5000K, 6000K	4.8
769190044	TENZER L 1000mm 100W RGBW 4in1 24V/220V DMX IP66	100 W	1000×60×120	24 V, 220 V	2.5°, 9°, 15°, 20°, 30°, 45°, 15°×60°	RGBW	4.8
769190046	TENZER L 1000mm 100W RGBWCLA 7in1 24V/220V DMX IP66	100 W	1000×60×120	24 V, 220 V	15°, 20°, 30°, 10°×60°	RGBWCLA	4.8