

TRACKER L



view



RAL








1 overall dimensions



size

1

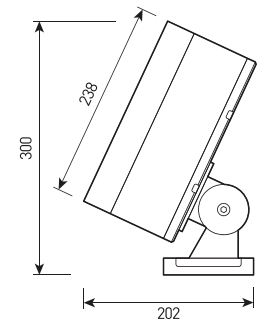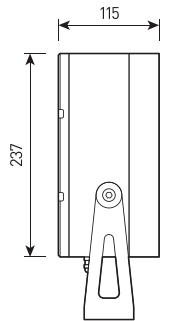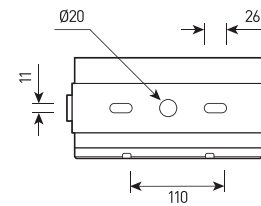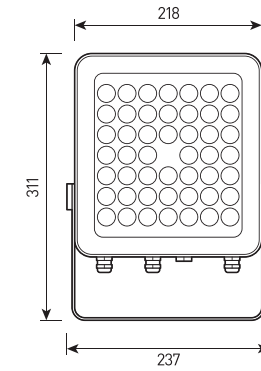

TRACKER L

Multifunctional floodlight for accent lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	3.5°, 7°, 10°, 12°, 15°, 25°, 40°, 60°, 10°×25°, 15°×35°, 10°×60°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature:	3000K, 4000K, 5000K, RGB 3in1, RGBW 4in1
Input voltage:	24V, 220V
Control system:	On/Off, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	5.8 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
765120049	TRACKER L 45W 220V SINGLE IP66	45W	237×311×115	24V, 220V	3.5°	3000K, 4000K, 5000K	5.8
765120051	TRACKER L 45W 220V RGB3in1 IP66	45W	237×311×115	24V, 220V	3.5°	RGB	5.8
765120053	TRACKER L 45W 220V RGBW4in1 IP66	45W	237×311×115	24V, 220V	3.5°	RGBW	5.8
765120055	TRACKER L 60W 220V SINGLE IP66	60W	237×311×115	24V, 220V	7°, 15°, 25°, 40°, 60°, 15°×35°, 10°×60°	3000K, 4000K, 5000K	5.8
765120057	TRACKER L 60W 220V RGB3in1 IP66	60W	237×311×115	24V, 220V	10°, 12°, 25°, 40°, 60°, 10°×25°, 10°×60°	RGB	5.8
765120059	TRACKER L 60W 220V RGBW4in1 IP66	60W	237×311×115	24V, 220V	10°, 12°, 25°, 40°, 60°, 10°×25°, 10°×60°	RGBW	5.8
765120061	TRACKER L 80W 220V SINGLE IP66	80W	237×311×115	24V, 220V	7°, 15°, 25°, 40°, 60°, 15°×35°, 10°×60°	3000K, 4000K, 5000K	5.8
765120063	TRACKER L 80W 220V RGB3in1 IP66	80W	237×311×115	24V, 220V	10°, 12°, 25°, 40°, 60°, 10°×25°, 10°×60°	RGB	5.8
765120065	TRACKER L 80W 220V RGBW4in1 IP66	80W	237×311×115	24V, 220V	10°, 12°, 25°, 40°, 60°, 10°×25°, 10°×60°	RGBW	5.8