

TRACKER M



view



RAL






1 overall dimensions



size

1

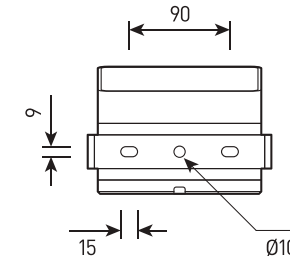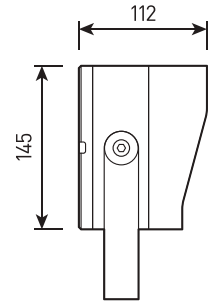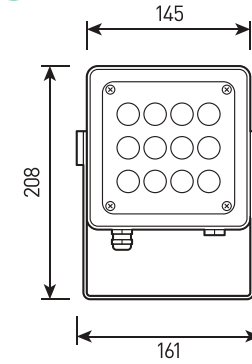

TRACKER M

Multifunctional floodlight for accent lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	3.5°, 7°, 10°, 12°, 15°, 25°, 40°, 60°, 10x25°, 15x35°, 10x60°
Housing color:	Black, Gray, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1, Tunable white
Input voltage, V:	24V, 220V
Control system:	On/Off, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	2.2 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
765120031	TRACKER M 20W 220V SINGLE IP66	20W	161x208x112	24V/220V	3.5°	3000K, 4000K, 5000K	2.2
765120033	TRACKER M 20W 220V RGB3in1 IP66	20W	161x208x112	24V/220V	3.5°	RGB	2.2
765120035	TRACKER M 20W 220V RGBW4in1 IP66	20W	161x208x112	24V/220V	3.5°	RGBW	2.2
765120037	TRACKER M 24W 220V SINGLE IP66	24W	161x208x112	24V/220V	7°, 15°, 25°, 40°, 60°, 15x35°, 10x60°	3000K, 4000K, 5000K	2.2
765120039	TRACKER M 24W 220V RGB3in1 IP66	24W	161x208x112	24V/220V	10°, 12°, 25°, 40°, 60°, 10x25°, 10x60°	RGB	2.2
765120041	TRACKER M 24W 220V RGBW4in1 IP66	24W	161x208x112	24V/220V	10°, 12°, 25°, 40°, 60°, 10x25°, 10x60°	RGBW	2.2
765120043	TRACKER M 36W 220V SINGLE IP66	36W	161x208x112	24V/220V	7°, 15°, 25°, 40°, 60°, 15x35°, 10x60°	3000K, 4000K, 5000K	2.2
765120045	TRACKER M 36W 220V RGB3in1 IP66	36W	161x208x112	24V/220V	10°, 12°, 25°, 40°, 60°, 10x25°, 10x60°	RGB	2.2
765120047	TRACKER M 36W 220V RGBW4in1 IP66	36W	161x208x112	24V/220V	10°, 12°, 25°, 40°, 60°, 10x25°, 10x60°	RGBW	2.2