

# TRACKER S



## view



RAL




## 1 overall dimensions



## size

### 1

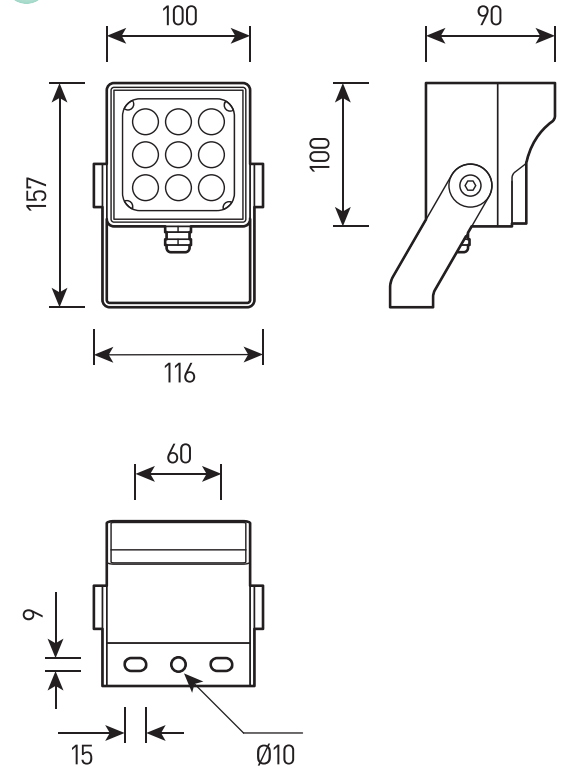

# TRACKER S

Multifunctional floodlight for accent lighting

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Beam angle:</b>	3.5°, 7°, 15°, 25°, 40°, 60°, 15x35°, 10x60°
<b>Housing color:</b>	Black, Gray, RAL
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature, K:</b>	3000K, 4000K, 5000K
<b>Input voltage, V:</b>	24V, 220V
<b>Control system:</b>	On/Off
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight, kg:</b>	1.3 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
765120025	TRACKER S 4W 220V SINGLE IP66	4W	157x116x90	24V/220V	3.5°	3000K, 4000K, 5000K	1.3
765120027	TRACKER S 9W 220V SINGLE IP66	9W	157x116x90	24V/220V	7°, 15°, 25°, 40°, 60°, 15x35°, 10x60°	3000K, 4000K, 5000K	1.3
765120029	TRACKER S 18W 220V SINGLE IP66	18W	157x116x90	24V/220V	7°, 15°, 25°, 40°, 60°, 15x35°, 10x60°	3000K, 4000K, 5000K	1.3