



## view


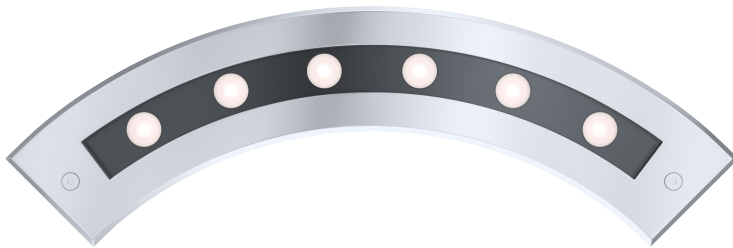


### 1 overall dimensions

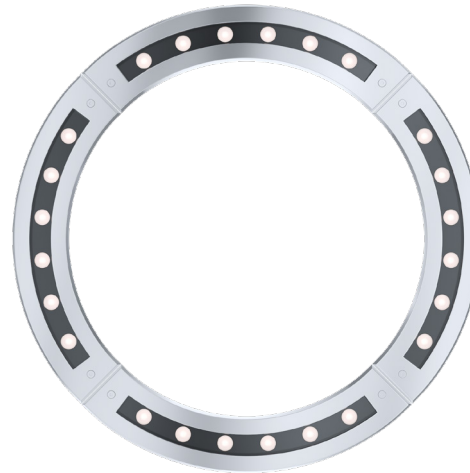

## size

### 1

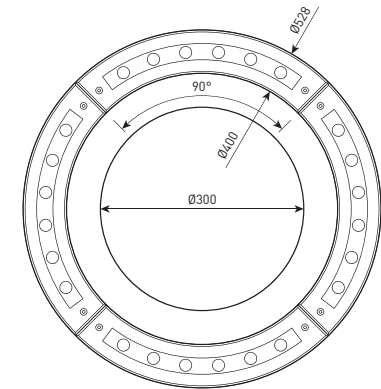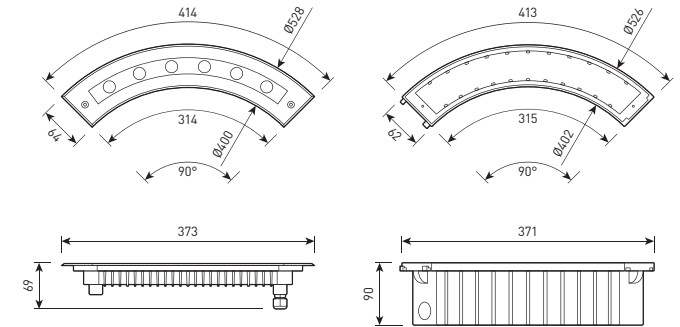

# YARRA S

Recessed ground luminaire for lighting rounded objects

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Beam angle:</b>	20°, 30°, 40°, 60°
<b>Housing color:</b>	Metallic
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature, K:</b>	2700K, 3000K, 4000K, 5000K, 6000K
<b>Input voltage, V:</b>	12V, 24V, 220V
<b>Control system:</b>	On/Off, 1-10V, DALI, DMX-512
<b>Ingress Protection Rating, IP:</b>	IP67
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight, kg:</b>	3.0 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
825030044	YARRA S 12W 12V/24V SINGLE IP67	12W	373x122x90	12V, 24V	20°, 30°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K	3.0
825030046	YARRA S 12W 220V SINGLE IP67	12W	373x122x90	220V	20°, 30°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K	3.0