


MELAN-G (350\650)



view




1 MELAN-G 350


2 MELAN-G 650



size

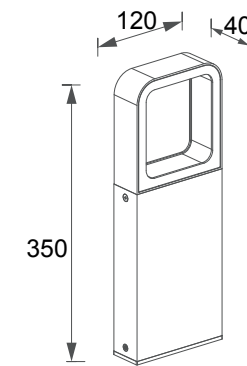

1

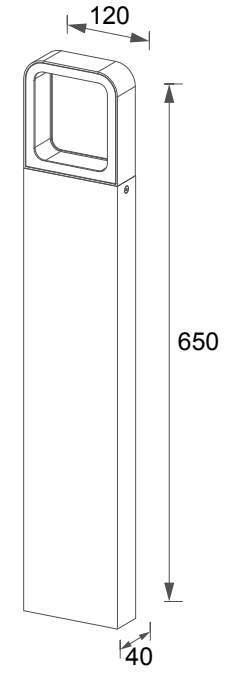

2

MELAN-G (350\650)

LED outdoor lighting 7W, IP65.

The luminaire has an ergonomic and convenient design, and is suitable for accentual lighting.

Suitable for use as outdoor lighting. The driver and the power supply are located inside the housing.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone sealants.
Fasteners:	Stainless steel, T=2.00mm
Glass:	tempered glass, 3.0 mm
Optical system:	Optical lens. Efficiency >85%
Optics with angles:	46°
Housing color:	Black, Grey, White
Operating temperature:	-40°C – +45°C (at startup: -20°C)
Weight:	0.94 kg/ 1.88 kg
Number of diodes (monochromatic)	7X1W

Article	Name	Power, W	Dimensions, mm	Beam angle°	Light flow, lm	Color rendering index	Power factor (PF)
69503110	Melan-G 350 7W 3000K 220V IP65	7 W	120 x 40 x 350 (650)	46°	240 lm	82	0,54
69503120	Melan-G 650 7W 3000K 220V IP65	7 W	120 x 40 x 350 (650)	46°	240 lm	82	0,54