


view


size




1 BELMOR XS

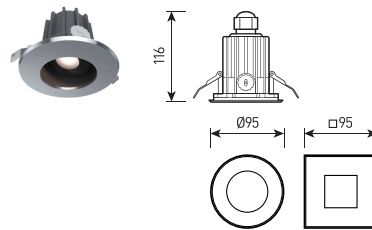


2 BELMOR S

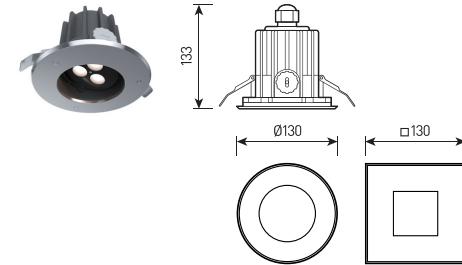


3 BELMOR M

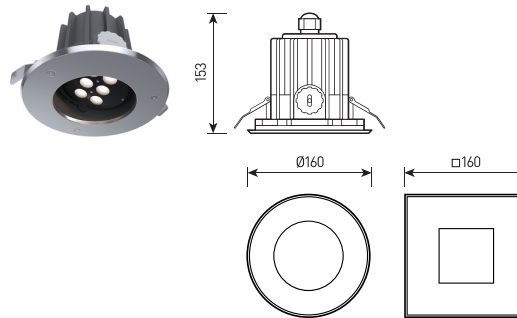


4 BELMOR L

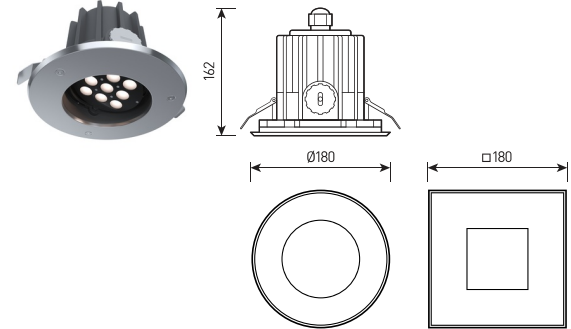

5 BELMOR XL

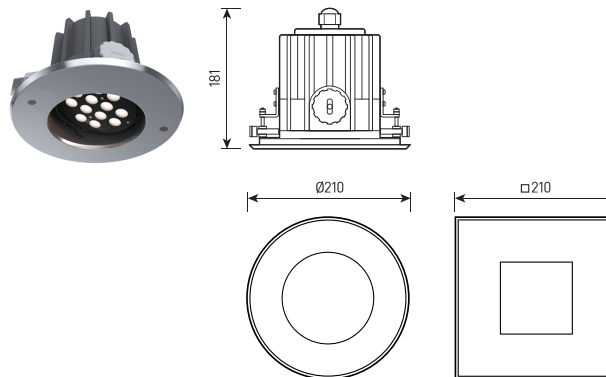

6 BELMOR XXL

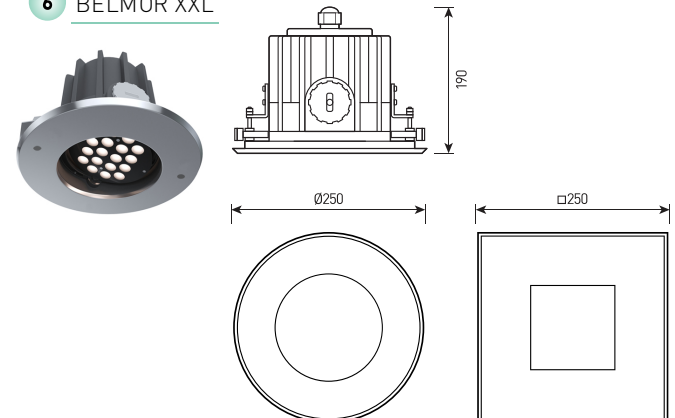

# BELMOR

Recessed luminaire with rotating LED matrix

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Housing color:</b>	Metallic
<b>Glass:</b>	Tempered glass
<b>Front ring, mount:</b>	Stainless steel
<b>LED rotation angle:</b>	-25° ~ +25°
<b>Beam angle:</b>	8°, 12°, 15°, 25°, 40°, 60°, 10°×45°, 20°×65°
<b>Color temperature:</b>	2700K, 3000K, 4000K, 5000K, 6000K, RGB, RGBW
<b>Control system:</b>	On/Off, DMX-512
<b>Input voltage:</b>	24 V, 220 V
<b>IES protection classes:</b>	Class I, Class III (SELV)
<b>Protection Rating:</b>	IP67
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight:</b>	0.8 – 4.5 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
533038097	BELMOR XS 3W 24V/220V IP67 Single color	3 W	Ø95×116	24 V, 220 V	8°, 15°, 40°, 60°, 10°×45°, 20°×65°	2700K, 3000K, 4000K, 5000K, 6000K	0.8
533038099	BELMOR XS 3W 24V DMX-512 IP67 RGB 3 in 1	3 W	Ø95×116	24 V	12°, 25°, 40°, 60°	RGB	0.8
533038101	BELMOR XS 4W 24V DMX-512 IP67 RGBW 4 in 1	4 W	Ø95×116	24 V	12°, 25°, 40°, 60°	RGBW	0.8
533038103	BELMOR S 6W 24V/220V IP67 Single color	6 W	Ø130×133	24 V, 220 V	8°, 15°, 40°, 60°, 10°×45°, 20°×65°	2700K, 3000K, 4000K, 5000K, 6000K	1.1
533038105	BELMOR S 6W 24V DMX-512 IP67 RGB 3 in 1	6 W	Ø130×133	24 V	12°, 25°, 40°, 60°	RGB	1.1
533038107	BELMOR S 8W 24V DMX-512 IP67 RGBW 4 in 1	8 W	Ø130×133	24 V	12°, 25°, 40°, 60°	RGBW	1.1
533038109	BELMOR M 12W 24V/220V IP67 Single color	12 W	Ø160×153	24 V, 220 V	8°, 15°, 40°, 60°, 10°×45°, 20°×65°	2700K, 3000K, 4000K, 5000K, 6000K	1.5
533038111	BELMOR M 12W 24V DMX-512 IP67 RGB 3 in 1	12 W	Ø160×153	24 V	12°, 25°, 40°, 60°	RGB	1.5
533038113	BELMOR M 16W 24V DMX-512 IP67 RGBW 4 in 1	16 W	Ø160×153	24 V	12°, 25°, 40°, 60°	RGBW	1.5
533038115	BELMOR L 18W 24V/220V IP67 Single color	18 W	Ø180×162	24 V, 220 V	8°, 15°, 40°, 60°, 10°×45°, 20°×65°	2700K, 3000K, 4000K, 5000K, 6000K	2.1
533038117	BELMOR L 18W 24V DMX-512 IP67 RGB 3 in 1	18 W	Ø180×162	24 V	12°, 25°, 40°, 60°	RGB	2.1
533038119	BELMOR L 24W 24V DMX-512 IP67 RGBW 4 in 1	24 W	Ø180×162	24 V	12°, 25°, 40°, 60°	RGBW	2.1
533038121	BELMOR XL 24W 24V/220V IP67 Single color	24 W	Ø210×181	24 V, 220 V	8°, 15°, 40°, 60°, 10°×45°, 20°×65°	2700K, 3000K, 4000K, 5000K, 6000K	3.2
533038123	BELMOR XL 27W 24V DMX-512 IP67 RGB 3 in 1	27 W	Ø210×181	24 V	12°, 25°, 40°, 60°	RGB	3.2
533038125	BELMOR XL 36W 24V DMX-512 IP67 RGBW 4 in 1	36 W	Ø210×181	24 V	12°, 25°, 40°, 60°	RGBW	3.2
533038127	BELMOR XXL 36W 24V/220V IP67 Single color	36 W	Ø250×190	24 V, 220 V	8°, 15°, 40°, 60°, 10°×45°, 20°×65°	2700K, 3000K, 4000K, 5000K, 6000K	4.5
533038129	BELMOR XXL 36W 24V DMX-512 IP67 RGB 3 in 1	36 W	Ø250×190	24 V	12°, 25°, 40°, 60°	RGB	4.5
533038131	BELMOR XXL 48W 24V DMX-512 IP67 RGBW 4 in 1	48 W	Ø250×190	24 V	12°, 25°, 40°, 60°	RGBW	4.5